



2080

Wheel loader



Technical specifications

Engine data Standard

| | |
|---------------------------|-----------------------|
| Manufacturer | Perkins |
| Engine type | 404D-22 |
| Cylinders | 4 |
| Engine performance (max.) | 36.3 (50*) kW (hp) |
| at rpm (max.) | 2,800 rpm |
| Cubic capacity | 2,216 cm ³ |
| Cooling system | Water |



Engine data Optional

| | |
|---------------------------|-----------------------|
| Manufacturer | Perkins |
| Engine type | 404F-22T |
| Cylinders | 4 |
| Engine performance (max.) | 44.7 (60*) kW (hp) |
| at rpm (max.) | 2,800 rpm |
| Cubic capacity | 2,216 cm ³ |
| Cooling system | Water |

Engine data Optional

| | |
|---------------------------|-----------------------|
| Manufacturer | Deutz |
| Engine type | TCD 2.9 L4 |
| Cylinders | 4 |
| Engine performance (max.) | 55.4 (75*) kW (hp) |
| at rpm (max.) | 2,300 rpm |
| Cubic capacity | 2,900 cm ³ |
| Cooling system | Water /charge air |

Electrical system

| | |
|-------------------|-------|
| Operating voltage | 12 V |
| Battery | 95 Ah |
| Alternator | 95 A |

Weights

| | |
|--------------------------------------------------|-------------------|
| Operating weight (standard) | 4,200 / 4,300* kg |
| Tipping load with bucket - machine straight | 3,020 / 3,320* kg |
| Tipping load with pallet fork - machine straight | 2,511 / 2,726* kg |

Vehicle data

| | |
|-------------------------|-------------------|
| Axle | PA 1,200 |
| Cab | Cab |
| Ground speed (optional) | 0 - 20 (28*) km/h |
| Speed stages | 2 |



| | |
|-----------------------------|------|
| Fuel tank capacity | 65 l |
| Hydraulic oil tank capacity | 50 l |

Hydraulic system

| | |
|-------------------------------------------|-------------------|
| External services - Operating pressure | 445 bar |
| Steering hydraulics - Oil flow (optional) | 56 (63-116) l/min |
| Steering hydraulics - Operating pressure | 210 bar |

* Values with optional Deutz engine
tipping load calculation according to ISO 14397

Vibrations (weighted average effective value)

Hand-arm vibrations (HAV): The hand-arm vibrations are no more than 2.5 m/s²

Whole body vibrations: This machine is equipped with a driver's seat that meets the requirements of EN ISO 7096:2000.

When the loader is properly used, the whole body vibrations vary from below 0.5 m/s² up to a short-term maximum value.

It is recommended to use the values specified in the table when calculating the vibration values according to ISO/TR 25398:2006. At the same time the actual use conditions have to be taken into consideration.

Telescopic loaders, like wheel loaders, are to be classified by operating weight.


| Type of loader | Typical operating conditions | Average value | | | Standard deviation (s) | | |
|-------------------------------------------------------|----------------------------------------------------------|----------------------------------------------|----------------------------------------------|------------------------------------|----------------------------------------|----------------------------------------|------------------------------|
| | | $1.4 \cdot a_{w,eqx}$ [m/s ²] | $1.4 \cdot a_{w,eqy}$ [m/s ²] | $a_{w,eqz}$ [m/s ²] | $1.4 \cdot s_x$ [m/s ²] | $1.4 \cdot s_y$ [m/s ²] | s_z [m/s ²] |
| Compact wheel loader (operating weight < 4,500 kg) | Load & carry (load and transport work) | 0.94 | 0.86 | 0.65 | 0.27 | 0.29 | 0.13 |
| Wheel loader (operating weight > 4,500 kg) | Load & carry (load and transport work) | 0.84 | 0.81 | 0.52 | 0.23 | 0.2 | 0.14 |
| | Application in extraction (harsh application conditions) | 1.27 | 0.97 | 0.81 | 0.47 | 0.31 | 0.47 |
| | Transfer drive | 0.76 | 0.91 | 0.49 | 0.33 | 0.35 | 0.17 |
| | V-operation | 0.99 | 0.84 | 0.54 | 0.29 | 0.32 | 0.14 |



2080

Wheel loader

Dimensions

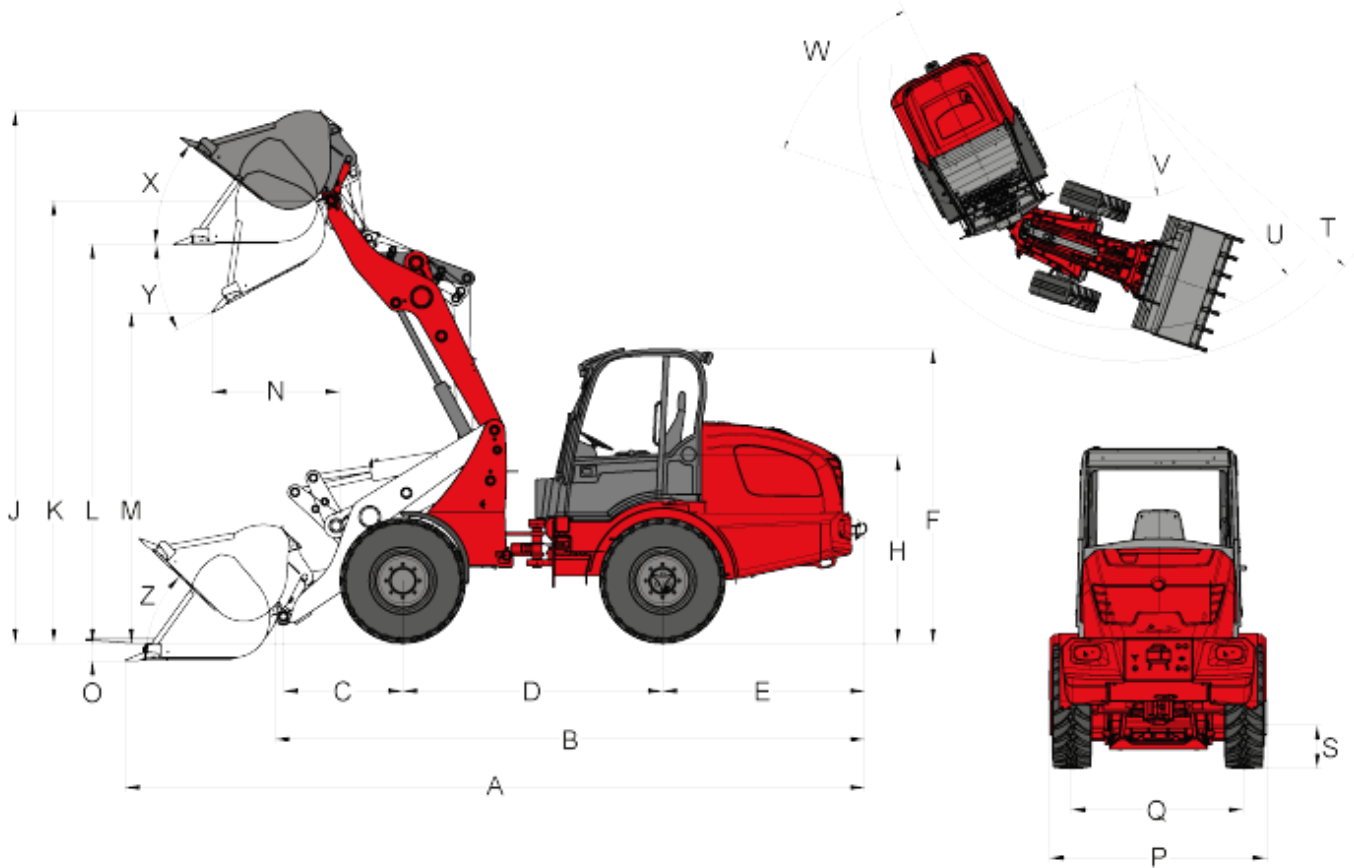

Standard tyres 11.5 / 80 - 15 AS ET40

| | | |
|---|---------------------------------------|----------|
| A | Total length | 5,037 mm |
| B | Total length (without bucket) | 4,281 mm |
| C | Axle middle to bucket pivot pin | 675 mm |
| D | Wheelbase | 2,045 mm |
| E | Rear overhang | 1,516 mm |
| F | Height to top of cabin - low-profile | 2,359 mm |
| F | Height to top of cabin - high-profile | 2,535 mm |
| H | Seat top height | 1,429 mm |



| | | |
|---|---------------------------------------|----------|
| J | Total working height | 3,828 mm |
| K | Height of bucket pivot (max.) | 3,239 mm |
| L | Load-over height | 2,950 mm |
| M | Dumping height | 2,509 mm |
| N | Operating distance for M | 177 mm |
| O | Digging depth | 62 mm |
| P | Total width | 1,410 mm |
| Q | Track width | 1,113 mm |
| S | Ground clearance | 270 mm |
| T | Maximum radius external | 3,523 mm |
| U | Radius at the outer edge | 3,316 mm |
| V | Inside turning radius | 1,727 mm |
| W | Inclination angle | 45 ° |
| X | Rollback angle at max. lifting height | 52 ° |
| Y | Dumping angle (max.) | 39 ° |
| Z | Rollback angle (on the ground) | 45 ° |

**2080**

Wheel loader

Standard features**Motor**

- Perkins 404 D-22 (36.3 kW / 50 hp) - Exhaust emission level IIIA

Drive system

- PA1200 planetary axle
- Hydrostatic all-wheel drive, travel direction can be selected via joystick
- Service brake: Hydrostatic drive system acting on all 4 wheels (wear-free)
- Central service and parking brake in the drive train acting on all 4 wheels
- 100% differential lock, electric-hydraulically connectable on front and rear axle
- Tires 11.5 / 80 - 15.3 AS ET40

Steering system

- Hydraulic articulated pendulum steering, 12° oscillating angle

Hydraulics

- 3rd control circuit in front electrically proportional in parallel via joystick
- Hydraulic oil cooler
- Floating position for lift cylinder

Driver's Cabin

- Comfort cabin with heater and fan, laterally tiltable, roll-over protective structure / FOPS-tested ("low" cabin height 2359 mm)
- Comfort seat with safety belt, fully suspended, weight, back and horizontal adjustment
- Hydraulic pilot operated joystick with direction control switch and integrated touch button for differential lock
- Adjustable steering wheel

Other

- Working lights (2 front, 2 rear)
- Operating hour meter
- Battery circuit breaker
- Fuel display
- Hydraulic quick-change system for attachments
- Toolbox in the vehicle rear
- Bucket status display
- Self-recovery coupling
- Lighting display according to Road Traffic Regulations

**2080**

Wheel loader

Options**Motor**

- Perkins 404F-22T (44.7 kW / 60 hp) - Exhaust emission level IIIB
- Deutz TCD 2.9 L4 (55.4 kW / 75 hp) - Exhaust emission level IIIB
- Engine pre-heater + hydraulic oil pre-heater 230 V

Drive system

- Hand inching (creep speed controller)
- Speed increase to 28 km/h
- Load arm dampening

Driver's Cabin

- Comfort cabin with heater and fan, laterally tiltable, roll-over protective structure / FOPS-tested ("high" cabin height 2535 mm)
- Air-cushioned comfort seat (fabric)
- Heated seat
- Air-conditioning system
- Cabin plug receptacle 230 V

Lighting

- MEGA working lights (2 front, 2 rear)
- LED working lights (2 front, 2 rear)
- Rotating beacon

Hydraulics

- Unpressurised reverse travel (front / rear)
- Work hydraulics of large pump (63 l/min)
- Work hydraulics of large pump (70 l/min)
- Work hydraulics of large pump (74 l/min)
- High flow single-acting performance hydraulics (100 l/min), including unpressurised reverse travel and additional hydraulic oil cooler
- 3rd control circuit, electrically, proportionally, serial
- 4th additional control circuit electrically proportional in parallel
- Additional hydraulic oil cooler
- Dual-acting hydraulic connection in rear (30 or 51 l/min) proportional (two couplings) via reversing valve
- Dual-acting hydraulic connection in rear (30 or 51 l/min) (two couplings), including separate steering valve
- 2x dual-acting hydraulic connection in rear (30 or 51 l/min) (four couplings), including separate steering valve

Electrical connections

- Front plug receptacle, 7-pole for lighting front attachments
- Front plug receptacle, 3-pole (dual function)
- Plug receptacle for rear attachments, 7-pin
- Triple-pole plug receptacle in rear

Other

- Radio
- Reversing warning device (acoustic)



- Lowering brake valve
- Combination case with warning triangle and first-aid kit
- Tool kit
- Fire extinguisher 2kg
- Counterweight floor plate
- Automatic trailer coupling
- Approval as self-propelled work machine with AHK*
- Official approval for road use
- Fully automatic central lubrication unit
- Custommade paint finish
- Hand lever grease gun
- Registration plate mounting
- TÜ expert's report (addendum in vehicle documentation)

* Trailer coupling

Please note

that product availability can vary from country to country. It is possible that information / products may not be available in your country. Photos may depict options. Subject to change without notice. Errors and omissions are reserved. The contractual agreement is expressly decisive. More detailed information on engine power can be found in the operator's manual; the stated power may vary due to specific operating conditions.

Subject to alterations and errors excepted. Applicable also to illustrations.

Copyright © 2017 Weidemann GmbH.